


DATA SHEET – DIMENSIONS

MULTI-FASTER COUPLINGS 3PLV - 5 LINES

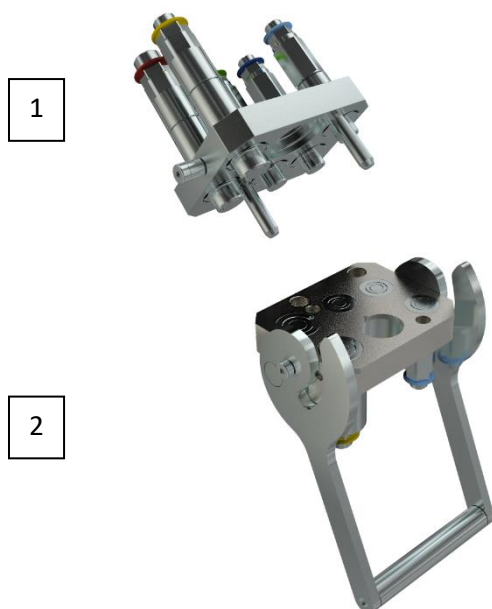

Faster

ARTICLE	
Fixed part (2)	Mobile part (1)
14550	14551

Article:	14550	14551
Supplier:	Italy	
Spillage:	0.02 ml	
Max. working pressure:	250 Bar	
Temperature range:	-25 °C to 100 °C	
Connection:	2 x 3/8", 3 x 9/16"	
Product weight:	5.21 kg	5,6 Kg
Max. flow rate:	20 l/min for 3/8" and 35 l/min for 9/16"	
Material:	Aluminium and steel	

